


INSTALLATION INSTRUCTIONS

TRG 20 & TRG 40

SWPX20 & SWPX40

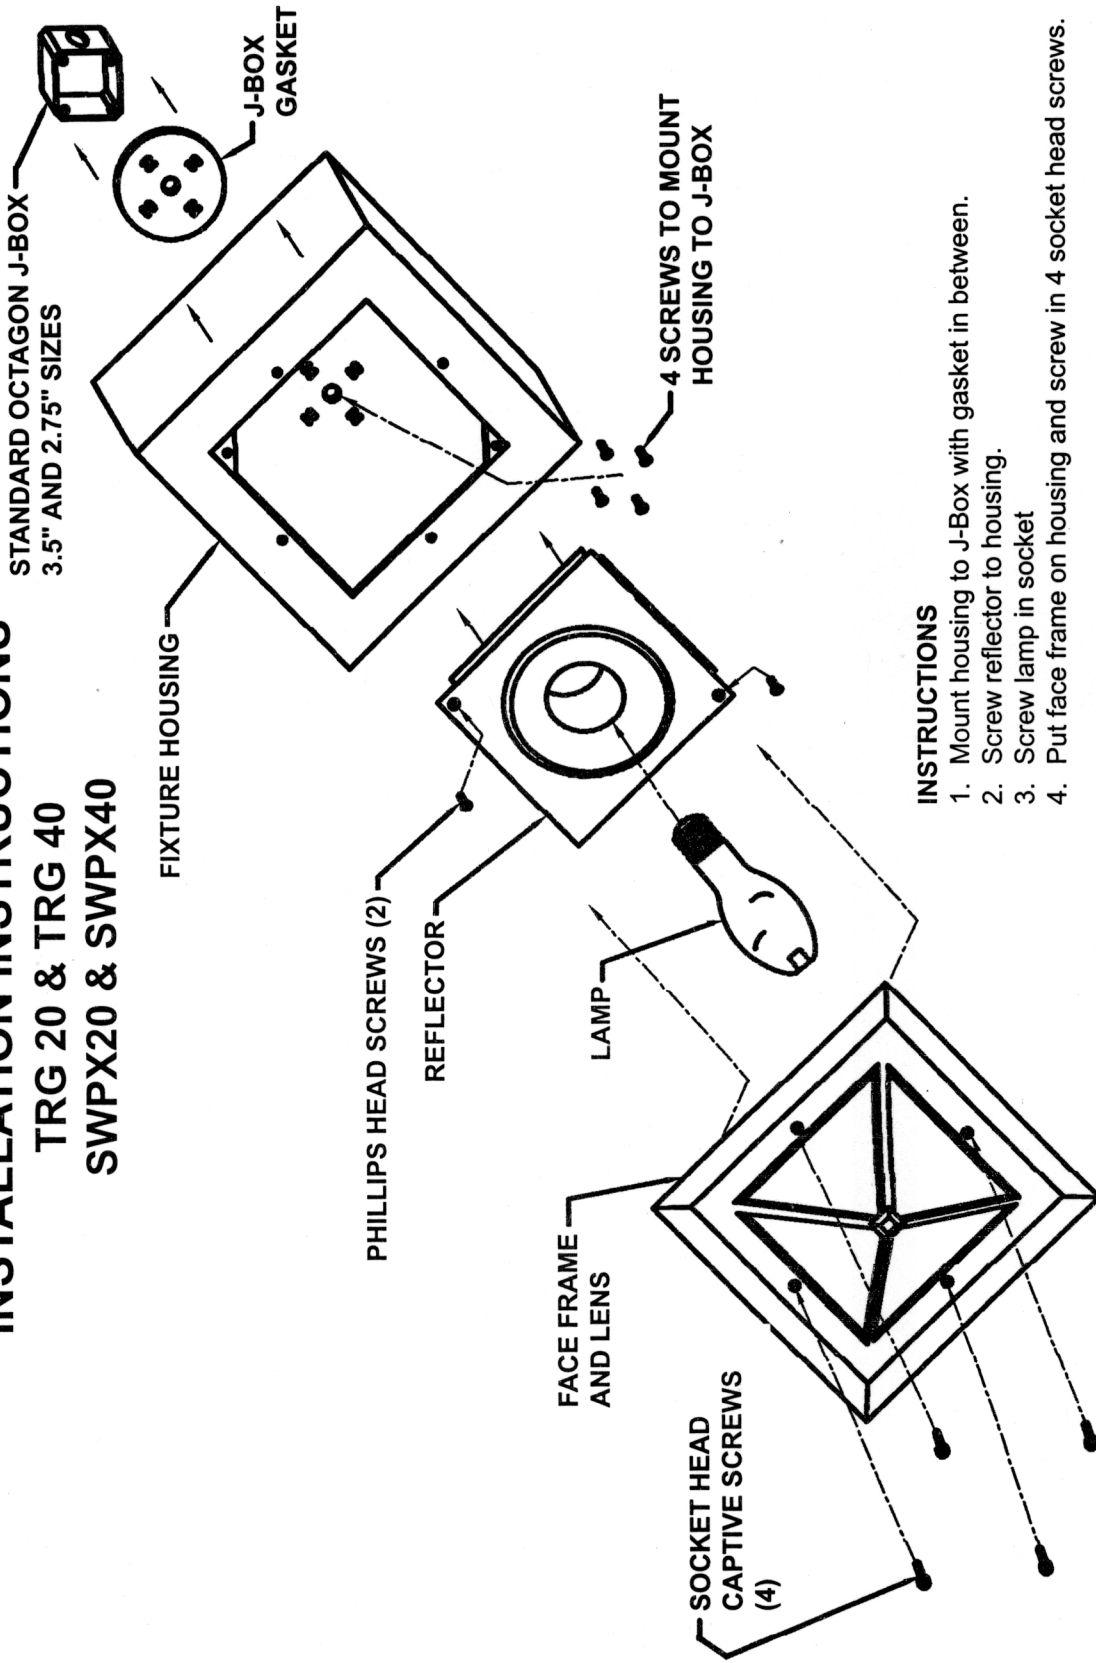

INSTRUCTIONS

1. Mount housing to J-Box with gasket in between.
2. Screw reflector to housing.
3. Screw lamp in socket
4. Put face frame on housing and screw in 4 socket head screws.

1. Power must be turned off during installation and maintenance. The lamp and fixture operate at high temperatures. Contact with combustible material can cause fire and personal contact can cause severe burns.
2. Do not use in areas of limited ventilation or in high ambient enclosures.
3. Fixtures must be installed by a licensed electrician in accordance with the National Electric Code, and any local codes that apply.
4. CAUTION: Do not use on unground 480v circuits.

For Technical Services
and Warranty Support,
call 540-394-2100.

601747D
Rev. A 02/01