



A rugged energy-efficient, long-life ceiling mount family

The Devine Lighting GFP80 Series is a rugged, low profile ceiling fixture with multiple mounting capabilities. The addition of the 100w and 70w Icetron Induction systems from Sylvania make the unit a great solution for parking garage and other low mounting height applications.



Key Features & Benefits

- Ceiling, Quick Mount, Garage, Pendant mounts
- 100w (4067 delivered lumens) or 70w (3300 delivered lumens) – Icetron™ Systems, 4100K
- 100,000 rated life for low/no maintenance
- Universal voltage 108-305V
- 80 CRI, Instant-on, White light
- Quiet operation – “A” sound rating
- Units are listed to UL1598 for use in wet locations
- Rated for -40°C to 40°C ambient for long life and reliable operation
- Five year limited warranty




ORDERING INFORMATION ON REVERSE SIDE

GFO/GFP

Parking Garage

PARKING GARAGE

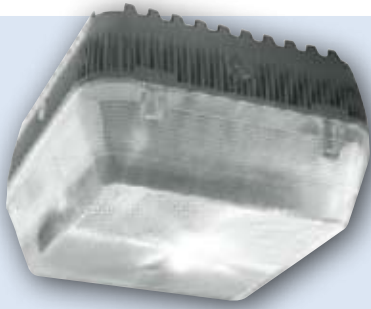




FEATURES

- Rugged cast aluminum housing with 3/4" wiring hubs and versatile mounting capabilities: Surface mount over recessed boxes, Quick Mount wet location box, Adjustable trunnion mount, Pendant mount and Semi-recessed concrete pour or drywall mount.
- Compact 10" sq. GFO40 or 14" sq. GFP80
- Stainless steel screw closure with aircraft cable lens retainer
- Polycarbonate refractor is prismatic
- Reflector is high gloss white to maximize the lamp lumens into the refractor
- Wattages range from 26w CFL to 150w PSMH, including energy-saving induction @ 70w and 100w
- Standard finishes include dark bronze, black, white and platinum
- GFP80 is listed to UL1598 for use in wet locations

ORDERING INFORMATION

SERIES	WATTAGE/SOURCE	VOLTAGE ²	FINISH	OPTIONS
GFO40 GFO40 Series	GFO40	120 120V	DB Dark Bronze	C43 Cast junction box
GFP80 GFP80 Series	70HPS 70w HPS, Medium Base	277 277V	BLK Black	TP Tamper proof
	70MH 70w PSMH, Medium Base	MT Multi-Tap 120/208/240/277V	WHT White	PC Photocell
	2PLC13-ELB 2 13w CFL, G24q-1 Base	347 347V	SAL Platinum	F Fusing
	PLC26-ELB 26w CFL, G24q-3 Base	U 120-277V (Induction)		RTW90 Clear Lenticular lens (GFO40)
	GFO80/GFP80			EMQ Emergency Quartz Restrike (socket only) ³
	100HPS 100w HPS, Medium Base			EMQLP EMQ Lamp ³
	150HPS 150w HPS, Medium Base			LP Lamp Included ⁴
	100MH 100w PSMH, Medium Base			
	150P 150w PSMH, Medium Base			
	2PLC26 2 26w CFL, G24d-3 Base Mag.			
	PLT42-ELB 42w CFL, GX24q-4 Base			
	100I¹ 100w Induction (4067 delivered lumens)			
	70I¹ 70w Induction (3300 delivered lumens)			

1 Contains Sylvania Icteron® system, 4100K Available in GFP80 model
 2 50Hz 220/240V available (consult factory)
 3 Not available on induction
 4 Lamp included for induction

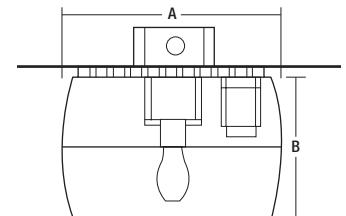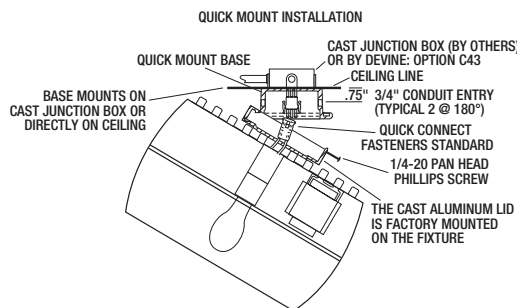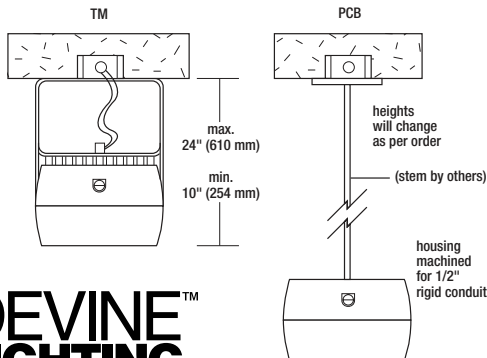

	A	B
GFO40	10"	7"
	254 mm	178 mm
GFP80	14 1/4"	8 1/2"
	362 mm	216 mm

