

BWD/BWU

Wall / Ceiling Mount

FEATURES

- Tempered glass lens, sealed to cast aluminum door and secured to housing with stainless steel allen-head screws
- BWD has opal glass for soft distribution with lamp image shielding; BWU has clear lens for maximum uplight
- Heavy-wall, cast aluminum housing; Mounts over recessed j-boxes with galvanized steel wall flange
- No exposed mounting hardware
- Soft, uniform Type V distribution from BWD opal lens; Slight asymmetric distribution from clear lens uplight version; Specular reflector increases lumen output
- Available in 50, 70, 100w PSMH and HPS, 26w CFL and 100w max incandescent
- Standard finishes include dark bronze, black, white and platinum
- BWD's full cut-off distribution is IDA compliant



DECORATIVE SURFACE MOUNT

ORDERING INFORMATION

SERIES	WATTAGE/SOURCE	VOLTAGE	FINISH	OPTIONS
BWD15 Downlight	50HPS 50w HPS, medium base	120 120V	DB Dark Bronze	F Fusing
BWU15 Uplight	70HPS 70w HPS, medium base	277 277V	BLK Black	LP Lamp included
	100HPS 100w HPS, medium base	MT Multi-Tap 120/208/240/277V	WHT White	
	50MH 50w PSMH, medium base	347 347V	SAL Platinum	
	70MH 70w PSMH, medium base			
	100MH 100w PSMH, medium base			
	150INC 150w Incandescent, medium base			
	2PLC26 2 26w CFL, G24d-3 base, mag.			


Dimensions: 15 1/2" h x 8"w x 8 1/8"d

TRG

Wall / Ceiling Mount

FEATURES

- Frosted glass lens softly distributes lamp lumens
- Held by heavy-wall cast aluminum frame with tamper-resistant stainless steel allen-head screws
- Rugged construction with cast aluminum housing, incandescent or HID versions; Galvanized steel mounting plate on incandescent version; Cast back box lags to wall on HID
- Type V distribution from two or four pane units; Frothing reduces lamp image
- Available in 50 and 70w PSMH and HPS, 75w max incandescent
- Standard powder paint finishes are dark bronze, black, white and platinum
- Listed to UL1598 for use in wet locations

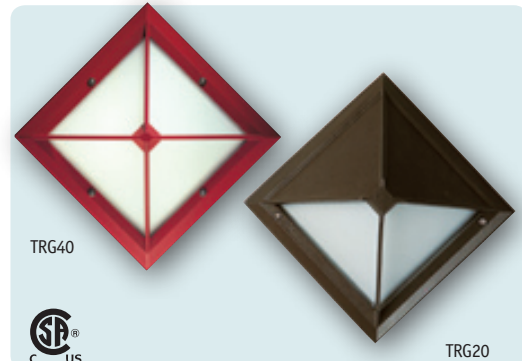

TRG40

TRG20



ORDERING INFORMATION

SERIES	WATTAGE/SOURCE	VOLTAGE ¹	FINISH	OPTIONS
TRG20 2 Pane	50HPS 50w HPS, medium base	120 120V	DB Dark Bronze	F Fusing
TRG40 4 Pane	70HPS 70w HPS, medium base	277 277V	BLK Black	LP Lamp included
	50MH 50w PSMH, medium base	MT Multi-Tap 120/208/240/277V	WHT White	
	70MH 70w PSMH, medium base	347 347V	SAL Platinum	
	75INC 75w Incandescent, medium base		CC Custom	

¹ 50 Hz, 220/240V available (consult factory)

Dimensions: Incandescent: 14" h x 9 15/16" w x 4 3/4" d
HID: 14" h x 9 15/16" w x 8 1/2" d

DEVINE LIGHTING™