

# BAU65/BAD65 SERIES


WALL MOUNT

Cat. #		Approvals
Job	Type	

**DEVINE  
LIGHTING™**


## SPECIFICATIONS

- Tempered glass lens is opal for uniform downlighting or clear for maximum uplighting. Gasketed to housing and supported by the cast aluminum door frame and secured with tamper-resistant stainless steel allenhead screws.
- Housing is heavy-wall cast aluminum for durability. Extruded arm and cast wall plate provide solid mounting.
- Opal glass BAD provides a soft Type V distribution. The BAU uplight has a clear lens with slight asymmetric distribution.
- Available in 70 watt metal halide and HPS, 2PLC13 fluorescent or 200 watt max. incandescent. Lamps not included unless ordered as option.
- Standard powder paint finishes include dark bronze, black, white and platinum.
- Full cutoff distribution (BAD series).
- Certified for use in wet locations to UL 1598.

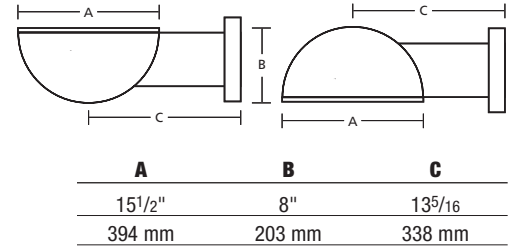

## ORDERING INFORMATION

ORDERING EXAMPLE: BAU65-70HPS-120-DB-LP



### SERIES

<b>BAU65</b>	Uplight
<b>BAD65</b>	Downlight

### WATTAGE/SOURCE

HPS	
<b>70HPS</b>	70W Medium Base
<b>Metal Halide</b>	
<b>70MH</b>	70W Medium Base
<b>Incandescent</b>	
<b>200INC</b>	200W Medium Base
<b>Fluorescent</b>	
<b>2PLC13</b>	GX23-2 Base Mag.

### VOLTAGE<sup>1</sup>

<b>120</b>	120V
<b>277</b>	277V
<b>MT</b>	Multi-Tap (120/208/240/277V)
<b>347</b>	347V

### FINISH

<b>DB</b>	Dark Bronze
<b>BLK</b>	Black
<b>WHT</b>	White
<b>SAL</b>	Platinum

### OPTIONS

<b>F</b>	Fusing
<b>LP</b>	Lamp Included

<sup>1</sup> 50Hz 220/240V available (consult factory).  
Note: See RA65 Pole Mount Series to complete the site.

Due to our continued efforts to improve our products, product specifications are subject to change without notice.

**DEVINE  
LIGHTING™**

Devine Lighting • 701 Millennium Boulevard • Greenville, SC 29607 • PHONE: 864-678-1000

For more information visit our web site: [www.hubbell-ltg.com](http://www.hubbell-ltg.com)