

BCR SERIES


WALL/CEILING MOUNT

Cat. #		Approvals
Job	Type	

**DEVINE
LIGHTING™**

SPECIFICATIONS

- Opal borosilicate glass lens provides long life and soft uniform distribution; Held by cast aluminum frame/door; Gasketed to housing and secured by stainless steel allenhead screws
- Heavy-wall cast aluminum housing and face trims offer rugged mounting and durability; Select from open face to spoke trim for complementary styling; Wall or ceiling mount
- Soft uniform Type V distribution for general accent/security illumination
- Available in 70 and 100 watt metal halide and HPS, PLC26/2PLC26/PLT42 fluorescent or 100 watt max. incandescent; Lamp not supplied unless ordered as an option
- Standard powder paint finishes are dark bronze, black, white and platinum
- Listed to UL1598 for use in wet locations

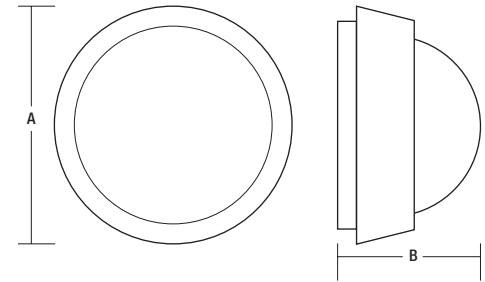

	A	B
BCR13	13" 330 mm	9 ³ / ₄ " 248 mm
BCR14-18	13" 330 mm	10 ³ / ₈ " 264 mm



ORDERING INFORMATION

ORDERING EXAMPLE: BCR13-70HPS-120-DB-LP

SERIES	WATTAGE/SOURCE	VOLTAGE ¹	FINISH	OPTIONS
BCR13	70HPS 70w HPS, medium base 100HPS 100w HPS, medium base	120 120V 277 277V MT Multi-Tap 120/208/240/277V 347 347V	DB Dark Bronze BLK Black WHT White SAL Platinum	F Fusing EMQ Emergency quartz relay PC³ Photocell LP Lamp included
BCR14	70MH 70w PSMH, medium base 100MH 100w PSMH, medium base			
BCR15	100INC 26w Incandescent, medium base			
BCR18	PLC26-ELB 26w CFL, GX24q-3 base 2PLC26-ELB 2 26w CFL, GX24q-3 base PLT42-ELB² 42w CFL, GX24q-4 base			

¹ 50 Hz, 220/240V available (consult factory)
² Accepts PLT26, PLT32 or PLT42 lamp(s)
³ Specify voltage

Due to our continued efforts to improve our products, product specifications are subject to change without notice.

**DEVINE
LIGHTING™**

Devine Lighting • 701 Millennium Boulevard • Greenville, SC 29607 • PHONE: 864-678-1000
For more information visit our web site: www.devine-ltg.com