

BWD/BWU SERIES

WALL MOUNT

Cat. #		Approvals
Job	Type	


**DEVINE
LIGHTING™**

SPECIFICATIONS


- Tempered glass lens, sealed to cast aluminum door and secured to housing with stainless steel allenhead screws. BWD has opal glass for soft distribution with lamp image shielding. BWU has clear lens for maximum uplight.
- Heavy-wall, cast aluminum housing. Mounts over recessed j-boxes with galvanized steel wall flange. Stays put! No exposed mounting hardware.
- Soft, uniform Type V distribution from BWD opal lens. Slight asymmetric distribution from clear lens uplight version. Specular reflector increases lumen output.
- Available in 50, 70, 100 watt metal halide and HPS, 2PLC26 fluorescent and 100 watt max. incandescent.
- Standard finishes include dark bronze, black, white and platinum.
- Full cutoff distribution (BWD).
- Certified for UL1598 for use in wet locations.



BWD

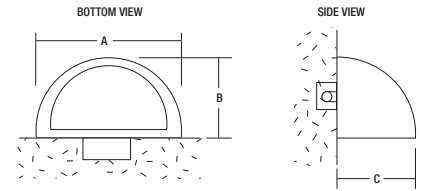

BWU

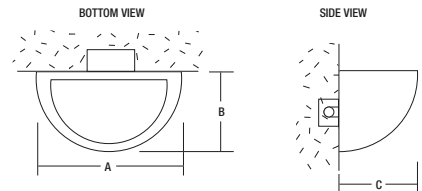


	A	B	C
BWD/BWU	15 1/2"	8"	8 1/8"
	394 mm	203 mm	206 mm



ORDERING INFORMATION

ORDERING EXAMPLE: BWD15-50HPS-120-SAL-F



SERIES

BWD15	Downlight
BWU15	Uplight

WATTAGE/SOURCE

High Pressure Sodium	
50HPS	50W Medium Base
70HPS	70W Medium Base
100HPS	100W Medium Base
Metal Halide	
50MH	50W Medium Base
70MH	70W Medium Base
100MH	100W Medium Base
Fluorescent	
2PLC26	G24d-3 Base Mag.
Incandescent	
100INC	100W Medium Base

VOLTAGE

120	120V
277	277V
MT	Multi-Tap (120/208/240/277V)
347	347V

FINISH

DB	Dark Bronze
BLK	Black
WHT	White
SAL	Platinum

OPTIONS

F	Fusing
LP	Lamp Included

Due to our continued efforts to improve our products, product specifications are subject to change without notice.

**DEVINE
LIGHTING™**

Devine Lighting • 701 Millennium Boulevard • Greenville, SC 29607 • PHONE: 864-678-1000

For more information visit our web site: www.hubbell-ltg.com