

# F611/F610/432 SERIES STEPLIGHTS


Cat. #		Approvals
Job	Type	

**DEVINE  
LIGHTING™**


## SPECIFICATIONS

- Cast aluminum construction for wet location applications; 432 is available in cast aluminum only, concrete pour construction; F611 and F610 have optional cast bronze construction and can be ordered for drywall or concrete pour locations; 432 has 1/2" wiring hubs while F611/F610 have 3/4" hubs
- F611V5 is only offered in the 22 degree louvered face; 432 and F610 have either open glass face or louvered designs
- Formed aluminum reflectors maximize output
- Each series is offered in incandescent and compact fluorescent. See ordering information for selections
- Standard finish is gray on 432 with optional dark bronze; F611 and F610 are offered in dark bronze, black, white and platinum; With optional cast bronze face that has brushed satin finish
- Listed to UL1598 for use in wet locations


### F611




### F611

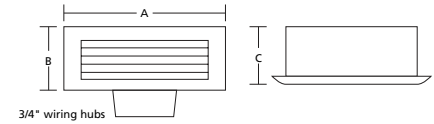

### F610




### F610



### 432



### 432

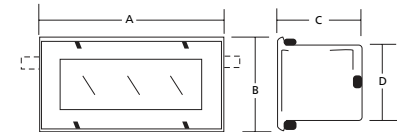

	A	B	C	D
<b>F611</b>	8 <sup>7</sup> / <sub>16</sub> "	3 <sup>7</sup> / <sub>8</sub> "	3"	–
	214 mm	98 mm	76 mm	–
<b>F610</b>	10 <sup>3</sup> / <sub>8</sub> "	5 <sup>13</sup> / <sub>16</sub> "	3 <sup>5</sup> / <sub>8</sub> "	–
	264 mm	148 mm	92 mm	–
<b>432</b>	10 <sup>3</sup> / <sub>4</sub> "	5 <sup>3</sup> / <sub>4</sub> "	4 <sup>7</sup> / <sub>16</sub> "	4"
	260 mm	133 mm	113 mm	102 mm

Note: Rough-in for drywall installation:  
F610 = 9 5/8" x 4 7/8" x 3 5/8"  
F611 = 7 3/16" x 3 3/8" x 3"



## ORDERING INFORMATION

ORDERING EXAMPLE: F610V3-PLC13-120-DB-DW

SERIES	WATTAGE/SOURCE	VOLTAGE <sup>1</sup>	FINISH	OPTIONS
<b>F610V2</b> F610V2 Open Face	<b>F610V2/F610V3</b>	<b>120</b> 120V	<b>DB</b> Dark Bronze	<b>DW<sup>2</sup></b> Drywall
<b>F610V3</b> F610V3 Louvered Face	<b>PLC13</b> 13w CFL, GX23-2 base, mag.	<b>277</b> 277V	<b>BLK</b> Black	<b>CP<sup>2</sup></b> Concrete pour
<b>F611V5</b> F611V5 Louvered Face	<b>60INC</b> 60w Incandescent, medium base		<b>WHT</b> White	<b>BZ</b> Cast bronze face
	<b>F611V5</b>		<b>SAL</b> Platinum	<b>BZ1</b> All cast bronze fixture
	<b>PL7</b> 7w CFL, G23 base, mag.			<b>JBTW</b> Junction box through-wire
	<b>40INC/T10</b> 40w Incandescent, medium base			<b>F</b> Fusing
				<b>LP</b> Lamp included

- 1 50 Hz, 220/240V available (consult factory)  
2 Must select drywall or concrete pour

## ORDERING INFORMATION 432 SERIES (CONCRETE POUR ONLY)

CATALOG NUMBER	LAMP TYPE	WATTAGE	LENS FRAME	WEIGHT lbs. (kg)
<b>432<sup>1</sup></b>	Incandescent	75w max.	Glass lens with aluminum frame	6.5 (3)
<b>432-21<sup>1</sup></b>	Incandescent	75w max.	45° louvered aluminum frame	7 (3.2)
<b>432-F9<sup>2,3</sup></b>	Fluorescent	9w	Glass lens with aluminum frame	8 (3.6)
<b>432-21-F9<sup>2,3</sup></b>	Fluorescent	9w	45° louvered aluminum frame	9 (4.1)

- 1 150°C wiring needed  
2 Lamp included, PL-S type, 2-pin  
3 277V available, consult factory for minimum quantity and pricing

Due to our continued efforts to improve our products, product specifications are subject to change without notice.

**DEVINE  
LIGHTING™**

Devine Lighting • 701 Millennium Boulevard • Greenville, SC 29607 • PHONE: 864-678-1000

For more information visit our web site: [www.devine-ltg.com](http://www.devine-ltg.com)