


LMS 100/200/300

Cat. #		Approvals
Job	Type	

**DEVINE
LIGHTING™**

SPECIFICATIONS

- Rugged cast aluminum housing and face. Cast bronze optional for the ultimate in life and quality. Concrete pour and drywall designs (must specify) 3/4" conduit hubs in external wiring compartment.
- Tempered, frosted glass for soft distribution and lamp image shielding. Gasketed for wet locations. Stainless steel allenhead screws are standard.
- Formed specular reflector maximizes output.
- Three sizes for proper scale for your project. Wattages range from 7 to 100 through various sources.
- NEW! 5 watt 120V LED system, provides long life, low maintenance.
- Standard finishes include dark bronze, black, white and platinum. Brushed finish on optional cast bronze face. Custom colors available, consult factory.
- CSA certified to UL1598 for use in wet locations.

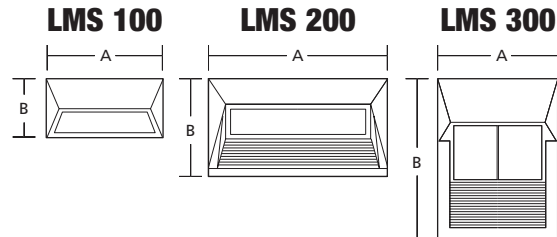

	A	B	Depth
LMS 100	87/16"	37/8"	3"
	214 mm	98 mm	76 mm
LMS 200	133/4"	77/8"	41/8"
	349 mm	181 mm	105 mm
LMS 300	93/4"	12"	5"
	248 mm	305 mm	127 mm

Note: Rough-in for drywall installation:
 LMS 100 = 7 3/4" x 3 3/8" x 3"
 LMS 200 = 13" x 6 1/8" x 4 1/8"
 LMS 300 = 9" x 11 1/8" x 5"




LMS 100 / LMS 200 only



ORDERING INFORMATION

ORDERING EXAMPLE: LMS100-PL7-120-DB-DW



SERIES

LMS100	LMS 100 Series
LMS200	LMS 100 Series
LMS300	LMS 100 Series

WATTAGE/SOURCE

LMS 100 Series	
5L²	5W LED 120V.
PL7	G23 Base Mag.
40INC	40W Incandescent Medium Base
LMS 200 Series	
50HPS	50W HPS Medium Base
50MH	50W MH Medium Base
PL9	G23 Base Mag.
PL13	GX23 Base Mag.
75INC	75W Incandescent Medium Base
LMS 300 Series	
70HPS	70W HPS Medium Base
100HPS	100W HPS Medium Base
70MH	70W MH Medium Base
100MH	100W MH Medium Base
PLC26	G24D-3 Base Mag.
PLT26-ELB	GX4q-3 Base
100INC	100W Incandescent Medium Base

VOLTAGE

120	120V
277	277V
MT	Multi-Tap (120/208/240/277V)
347	347V

FINISH

DB	Dark Bronze
BLK	Black
WHT	White
SAL	Platinum Silver

OPTIONS

DW¹	Drywall
CP¹	Concrete Pour
GD	Cast Guard (LMS300 only)
BZ	Cast Bronze Face
BZ1	All Cast Bronze Fixture
JBTW	Junction Box Through Wire
F	Fusing
LP	Lamp Included

¹ Must select drywall or concrete pour.
² 6350K color temperature.

Due to our continued efforts to improve our products, product specifications are subject to change without notice.

**DEVINE
LIGHTING™**

Devine Lighting • 701 Millennium Boulevard • Greenville, SC 29607 • PHONE: 864-678-1000

For more information visit our web site: www.hubbell-ltg.com